


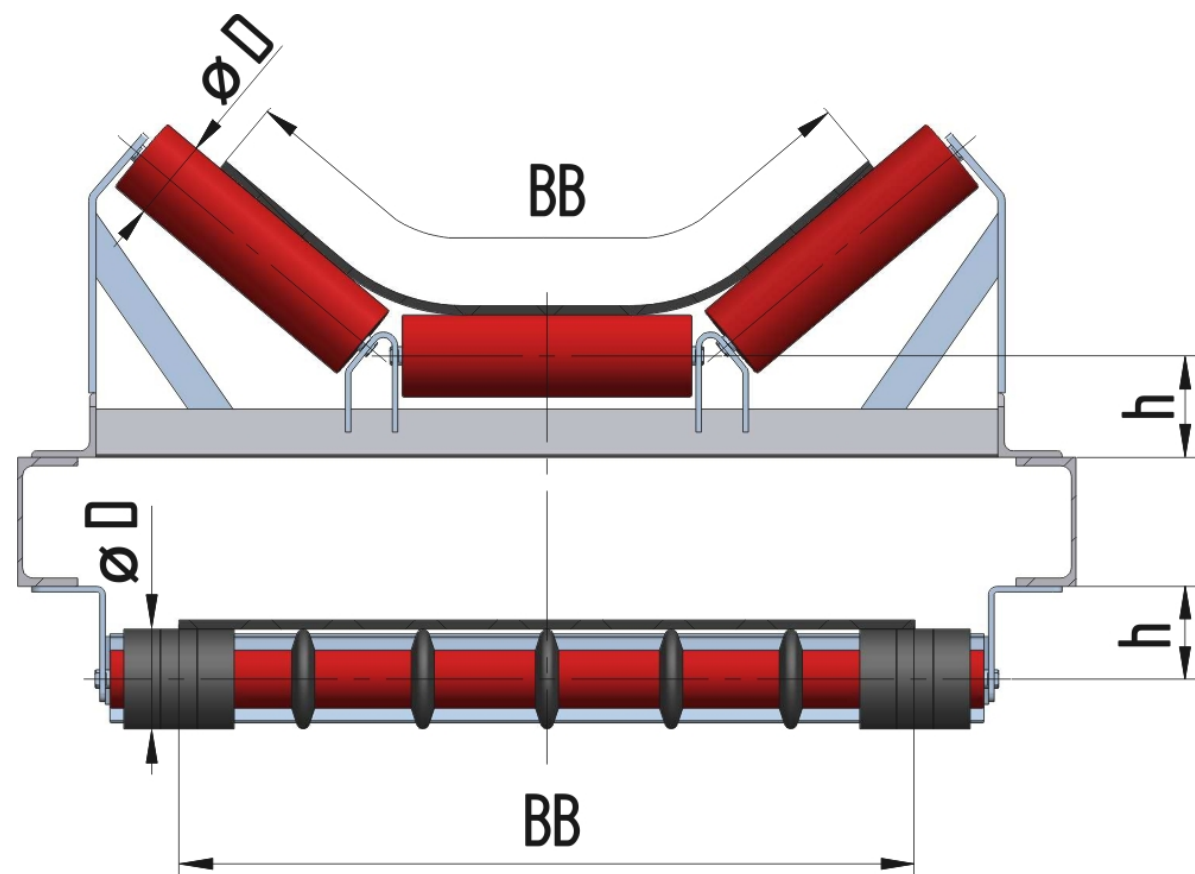

Carrying belt

Type	Basis	ø Rollers D (mm)	h (mm)	Belt width BB (mm)											
				400	500	650	800	1000	1200	1400	1600	1800	2000	2200	2400
PAL	U70x50x4	63-108	125	x						x	x	x	x	x	x
PUS	U100x50x5	89-133	135	x						x	x	x	x	x	x
PAH	U70x50x4	89-133	125	x					x	x	x	x	x	x	x
PAS	U100x50x5	63-108	125	x						x	x	x	x	x	x
PUH-L	U100x50x5	89-133	135	x	x						x	x	x	x	x
PUH	U100x50x5	89-133	135	x	x						x	x	x	x	x
PUT-145	U120x60x5	89-133	145	x	x	x	x					x	x	x	x
PUT-160	U120x60x5	89-159	160	x	x	x	x					x	x	x	x
VAL6	L60x6	63,5-108	125	x						x	x	x	x	x	x
VAL7	L70x7	89-133	135	x						x	x	x	x	x	x
VAL8	L80x8	89-159	160	x	x	x						x	x	x	x
VAL10	L100x10	89-159	175	x	x	x	x						x	x	x
L6	L60x6	89-108	125	x						x	x	x	x	x	x
L7-135	L70x7	89-133	135	x						x	x	x	x	x	x
L7-150	L70x7	89-133	150	x						x	x	x	x	x	x
L8	L80x8	108-159	160	x	x	x						x	x	x	x
L9	L90x9	108-159	170	x	x	x	x						x	x	x
L10-175	L100x10	133-159	175	x	x	x	x	x						x	x
L10-205	L100x10	133-159	205	x	x	x	x	x						x	x
L12	L120x12	133-159	200	x	x	x	x	x	x					x	x
U65	U65	89-108	125	x					x	x	x	x	x	x	x
U80	U80	89-133	125	x						x	x	x	x	x	x
U10-135	U100	89-133	135	x	x						x	x	x	x	x
U10-150	U100	89-133	150												
U12	U120	89-159	155	x	x	x						x	x	x	x
U14	U140	108-159	160	x	x	x	x						x	x	x
U16	U160	108-159	165	x	x	x	x	x						x	x
U18	U180	133-159	200	x	x	x	x	x	x						x
U20	U200	133-159	205	x	x	x	x	x	x	x					
SAN-100	PL.80/8	89-133	100					x	x	x	x	x	x	x	x
SAN-125	PL.80/8	89-133	100	x	x	x	x				x	x	x	x	x
PE2-125	U70/50/4	63-108	125					x	x	x	x	x	x	x	x
PE2-150	U70/50/4	63-133	150	x	x	x		x	x	x	x	x	x	x	x
SNLM-100	PL.80/8	63-108	100							x	x	x	x	x	x
SNLM-125	PL.80/8	63-108	125	x	x	x				x	x	x	x	x	x
TR108	Tr.108/4	133-159	220	x	x	x	x	x	x					x	x

Return frames

Type	Basis	ø Rollers D (mm)	h (mm)	Belt width BB (mm)											
				400	500	650	800	1000	1200	1400	1600	1800	2000	2200	2400
<u>DACH</u>	U70/50/4, U80-U220	63-219	40-90	x	x									x	x
<u>UL7</u>	L70/70/7	89-159	60-100	x	x	x				x	x	x	x	x	x
<u>UL8</u>	L80/80/8	108-219	70-140	x	x	x	x	x				x	x	x	x
<u>UL10</u>	L100/100/10	108-219	80-150	x	x	x	x	x	x	x					x
<u>UL12</u>	L120/120/12	108-219	80-150	x	x	x	x	x	x	x					x

Self tracking

Type	Basis	ø Rollers D (mm)	h (mm)	Belt width BB (mm)											
				400	500	650	800	1000	1200	1400	1600	1800	2000	2200	2400
<u>LESQ</u>	U100-U160	63-159	125-195									x	x	x	x
<u>LESOR</u>	U100-U160	63-159	125-195									x	x	x	x
<u>LESU</u>	U100,U120	63-159	170, 220									x	x	x	x
<u>LESUR</u>	U100,U120	63-159	170, 220									x	x	x	x

Idler supports

Type	ø Rollers D (mm)	h (mm)	Belt width BB (mm)											
			400	500	650	800	1000	1200	1400	1600	1800	2000	2200	2400
<u>QB1</u>	63-159	70, 100								x	x	x	x	x
<u>QB2</u>	133-219	100, 130	x	x	x	x	x	x	x					
<u>UB1</u>	63-159	70, 100								x	x	x	x	x
<u>UB2</u>	133-219	100, 130	x	x	x	x	x	x	x					