



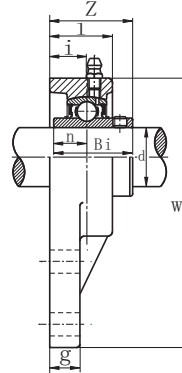

Flange Bracket Units

UCFB 200 (normal- duty)

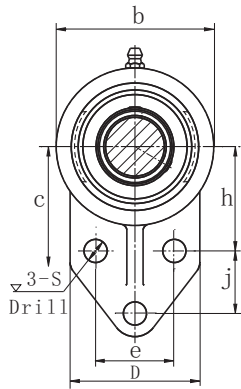

SR type seal



TRL type seal

Bearing unit No.	Shaft Dia.		Dimensions (in. ) or (mm)													Bolt used		Bearing No.	Housing No.	Weight (kg)	
	d		W	b	c	D	l	S	g	h	j	e	i	z	Bi	n					
	(in.)	(mm)															(mm)				(in.)
UCFB 201 201-8	1/2	12	4 11/32 110	2 7/16 62	2 7/16 52	2 1/4 52	1 25.5	25/64 10	1/2 13	1 21/32 42	1 1/16 27	1 17/64 32	1 19/32 15	1 5/16 33.3	1.2205 31.0	0.5000 12.7	M8	5/16	UC 201 201-8	FB 201	0.64
UCFB 202 202-10	5/8	15	4 11/32 110	2 7/16 62	2 7/16 52	2 1/4 52	1 25.5	25/64 10	1/2 13	1 21/32 42	1 1/16 27	1 17/64 32	1 19/32 15	1 5/16 33.3	1.2205 31.0	0.5000 12.7	M8	5/16	UC 202 202-10	FB 202	0.64
UCFB 203 203-11	1 1/16	17	4 11/32 110	2 7/16 62	2 7/16 52	2 1/4 52	1 25.5	25/64 10	1/2 13	1 21/32 42	1 1/16 27	1 17/64 32	1 19/32 15	1 5/16 33.3	1.2205 31.0	0.5000 12.7	M8	5/16	UC 203 203-11	FB 203	0.64
UCFB 204-12 204	3/4	20	4 11/32 110	2 7/16 62	2 7/16 52	2 1/4 52	1 25.5	25/64 10	1/2 13	1 21/32 42	1 1/16 27	1 17/64 32	1 19/32 15	1 5/16 33.3	1.2205 31.0	0.5000 12.7	M8	5/16	UC 204-12 204	FB 204	0.64
UCFB 205-14 205-15 205 205-16	7/8 15/16 1	25	4 9/16 116	2 11/16 68	2 7/16 52	2 7/32 56	1 1/16 27	25/64 10	1/2 13	1 49/64 45	1 1/16 27	1 11/32 34	5/8 16	1 13/32 35.7	1.3386 34	0.5630 14.3	M8	5/16	UC 205-14 205-15 205 205-16	FB 205	0.68
UCFB 206-18 206 206-19 206-20	1 1/8 3 1/16 2	30	5 13/64 132	3 5/32 80	2 5/32 55	2 9/16 65	1 7/32 31	25/64 10	1/2 13	1 31/32 50	1 9/64 29	1 37/64 40	45/64 18	1 37/64 40.2	1.5000 38.1	0.6260 15.9	M8	5/16	UC 206-18 206 206-19 206-20	FB 206	0.92
UCFB 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	5 21/32 144	3 17/32 90	2 7/16 62	2 3/4 70	1 11/32 34	25/64 10	19/32 15	2 11/64 55	1 17/64 32	1 13/16 46	3/4 19	1 3/4 44.4	1.6890 42.9	0.6890 17.5	M8	5/16	UC 207-20 207-21 207-22 207 207-23	FB 207	1.3
UCFB 208-24 208-25 208	1 1/2 1 9/16	40	6 15/32 164	3 15/16 100	2 27/32 72	3 1/16 78	2 7/64 36	15/32 12	5/8 16	2 23/64 60	1 39/64 41	1 31/32 50	53/64 21	2 1/64 51.2	1.9370 49.2	0.7480 19.0	M10	3/8	UC 208-24 208-25 208	FB 208	1.8
UCFB 209-26 209-27 209-28 209	1 5/8 1 1/2 1 3/4	45	6 57/64 175	3 4/16 106	3 76	3 5/32 80	1 1/2 38	15/32 12	23/32 18	2 9/16 65	1 1/16 43	2 1/8 54	55/64 22	2 1/16 52.2	1.9370 49.2	0.7480 19.0	M10	3/8	UC 209-26 209-27 209-28 209	FB 209	2.0
UCFB 210-30 210-31 210 210-32	1 7/8 1 5/8	50	7 21/64 186	4 31/64 114	3 7/32 82	3 3/8 86	3 7/64 40	15/32 12	23/32 18	2 43/64 68	1 13/16 46	2 9/32 58	55/64 22	2 5/32 54.6	2.0315 51.6	0.7480 19.0	M10	3/8	UC 210-30 210-31 210 210-32	FB 210	2.3