


COLLI-ROLLER TRACKS

the progressive integration in storage and conveying technique for middle weight loads

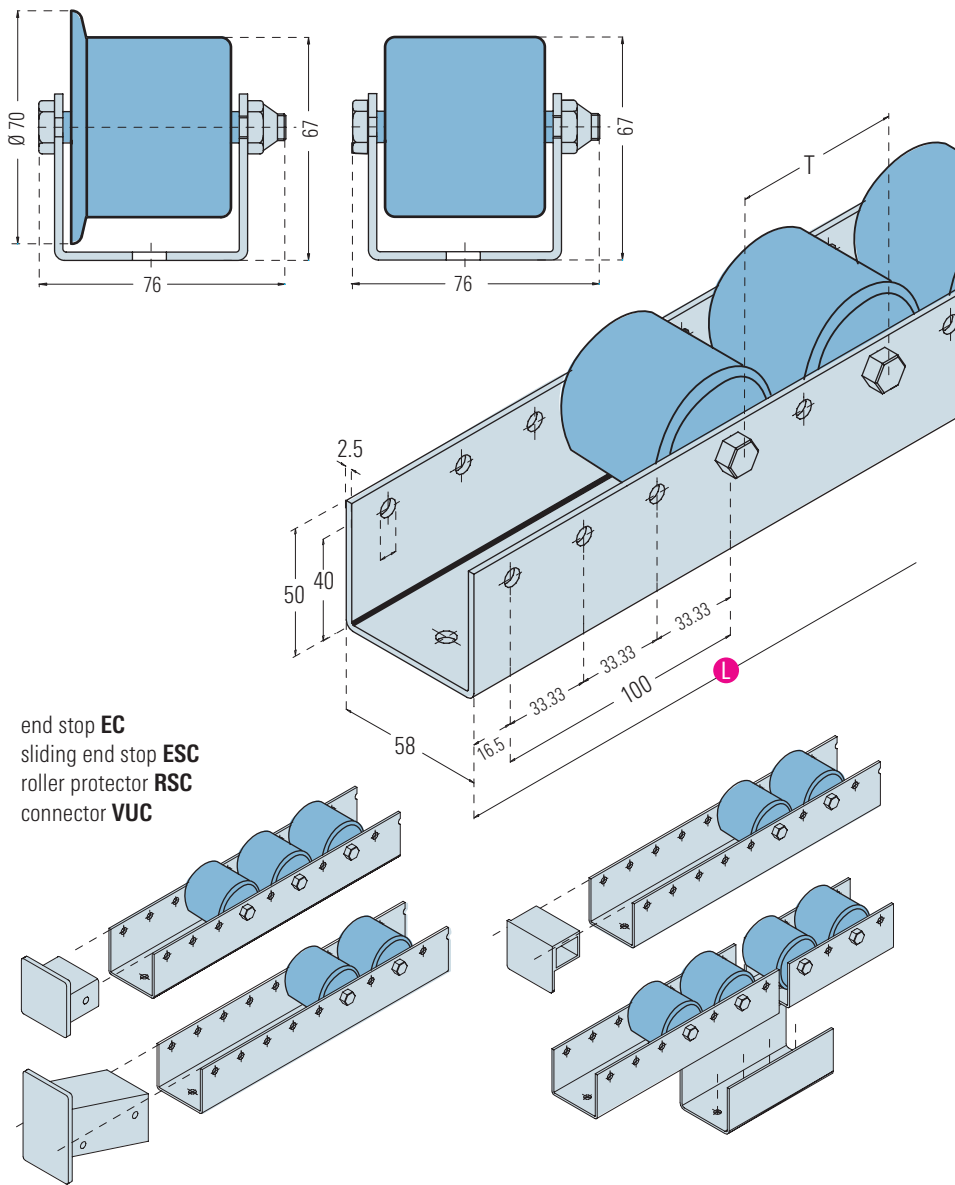

The standard length of the Colli-Roller Tracks is 6033 mm. As a rule, we can deliver each required length. However, please state a length where the last two figures are either 00, 33 or 66 (e.g. 4333 mm or 4300 mm or 4366 mm or 4400 mm).

Other lengths are special cuts:
/SK = S1/S2

The following roller pitch (**T**) can be supplied:
Normal rollers: 66, 100, 133, 166, 200
Flanged rollers: 100, 133, 166, 200
Alternately flanged roller and normal roller: 66, 100, 133, 166, 200

Order example:
NR 40-66/4400

Colli-Roller Track with normal rollers, 66 mm roller pitch, 4400 mm length of roller.

SR 40-100/2000

Colli-Roller Track with flanged rollers, 100 mm roller pitch, 2000 mm long.

NR/SR 40-66/3333

Colli-Roller Track alternately with normal and flanged rollers, 66 mm roller pitch, 3333 mm long.

end stop **EC**
sliding end stop **ESC**
roller protector **RSC**
connector **VUC**

ACCESSORIES

End stop: **EC**
Sliding end stop: **ESC**
Roller protector: **RSC**
Connector (incl. screws): **VUC**

COLLI-ROLLER TRACKS/SINGLE COMPONENTS

Design/Type	Pitch	/Length (max. 6,000 mm)	Special Cut /SK = S1/S2	Track without Rollers	Single Roller NR/SR	Axis with Lock Nut
NR 40	66, 100, 133, 166, 200 /	U58	NR	M8 X 70
SR 40	100, 133, 166, 200 /	U58	SR	M8 X 70
NR/SR 40	66, 100, 133, 166, 200 /	U58		M8 X 70


ACCESSORIES COLLI-ROLLER TRACK

End Stop	Sliding End Stop	Roller Protector	Connector
ESF	ESC	RSC	VUC

ROLLER TRACKS

The Colli-Roller Tracks combine many advantages. They are for many logistic applications the one and only solution. Ball bearing rollers are fitted in an exchangeable way in a zinc-plated U-shaped profile 50 x 58 x 50 x 2.5 mm, carrying capacity 40 daN (kg).

The 54 mm diameter roller can be supplied as normal roller or as flanged roller. Both roller types can, of course, be fitted by turns in the channels or each fourth roller can be exchange by a flanged roller for example. The roller cover is made of plastic, colour blue, material polypropylene. The loading capacity of the channels is shown as Wy 3.0 cm³. The Colli-Roller Tracks complete the Universal-Roller Tracks in their application due to the wide rolling surface. The field of application mentioned under Universal-Roller Tracks, also refers to the Colli-Roller Tracks.

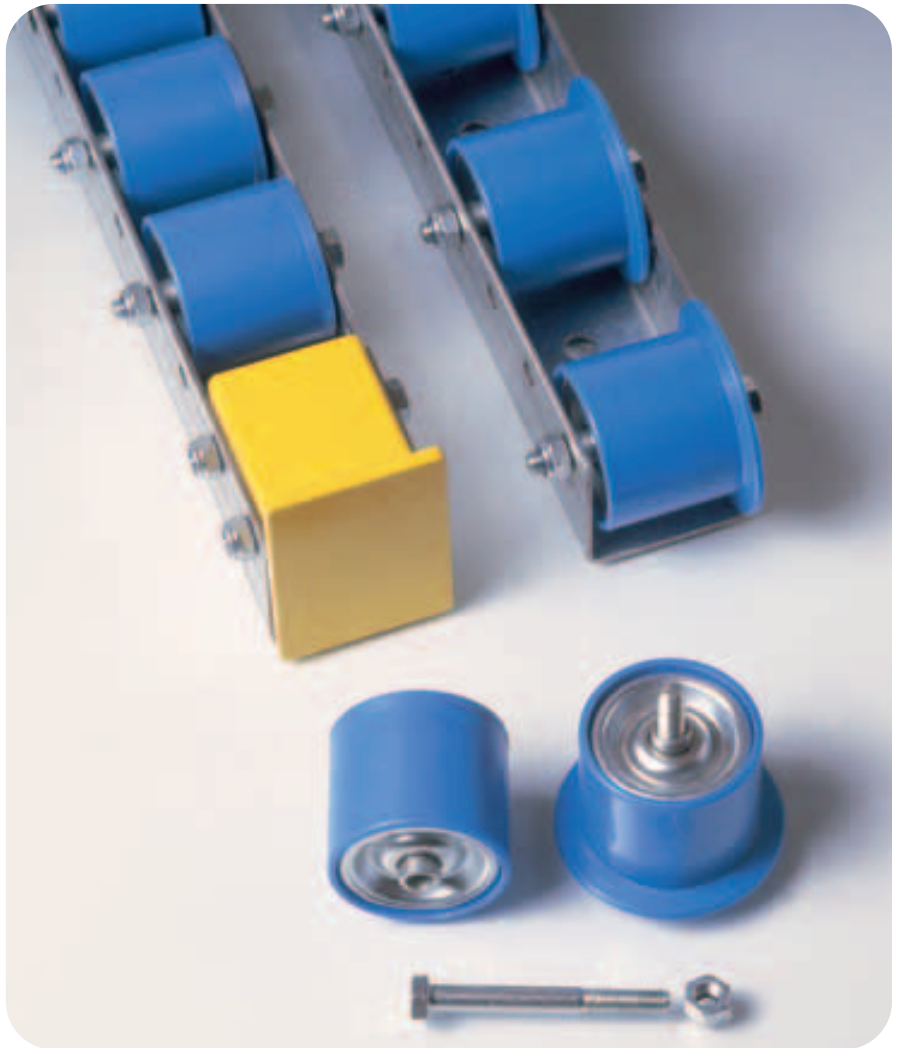

Profile without rollers: **U58**

Normal rollers dia. 54: **NR40**

Flanged rollers dia. 70/54: **SR40**

Axis with lock nut: **M 8 x 70**

